

909

FILTRO DE RECHAZO
REJECTION FILTER
FILTRE DE REJET



CÓDIGO-CODE-CODE		9090046
MODELO-MODEL-MODELE		RB-900
Número de entradas/salidas Number of inputs/outputs Nombre d'entrées/sorties		1/1
Rango de frecuencia Frequency range Gamme de fréquences	MHz	0-694
Atenuación de inserción Insertion loss Atténuation d'insertion	dB ± TOL	1 ± 0,2
Rechazo banda LTE 703-862 MHz LTE band rejection 703-862 MHz Rejection bande LTE 703-862 MHz	dB	60
Paso de corriente DC path Passage d'alimentation	V $\overline{\cdot}$ mA	+24 (max) 300 (max)
Temperatura de funcionamiento Operating temperature Température de fonctionnement	°C	-10..+65
Índice de protección Proteccion index Indice de protection		IP 53

Data published in compliance with the definitions and measurement methods of the following standards: EN 50083-3, EN 50083-4 and EN 50083-5


FILTRO RB-900
RB-900 FILTER
FILTRE RB-900



Entrada/Salida
 Input/Output
 Entrée/Sortie

Entrada/Salida
 Input/Output
 Entrée/Sortie

PUESTA EN FRECUENCIA DEL FILTRO
FREQUENCY RESPONSE OF THE FILTER
RÉPONSE EN FRÉQUENCE DU FILTRE

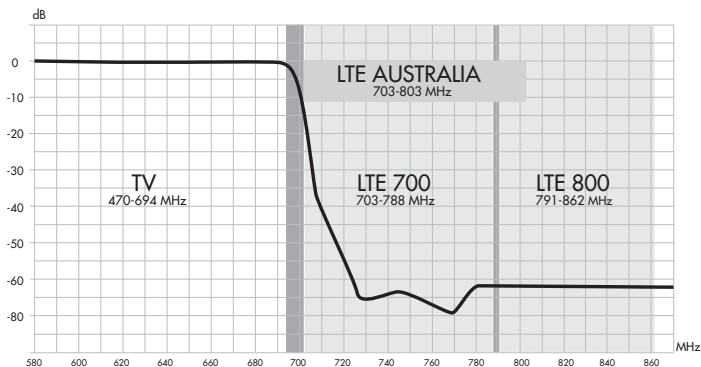

ESQUEMA TÍPICO
CONNECTION DIAGRAM
SCHEMA DE CONNEXION

